

立式剪切机

Vertical Cutting Baler


机器应用

广泛应用于各类橡胶、塑胶、塑料膜、塑料卷等产品的剪切

Usage

Specially used for cutting the materials like various rubber, plastic, plastic films, etc. into small pieces

Diagram(Model XTY-1500L)

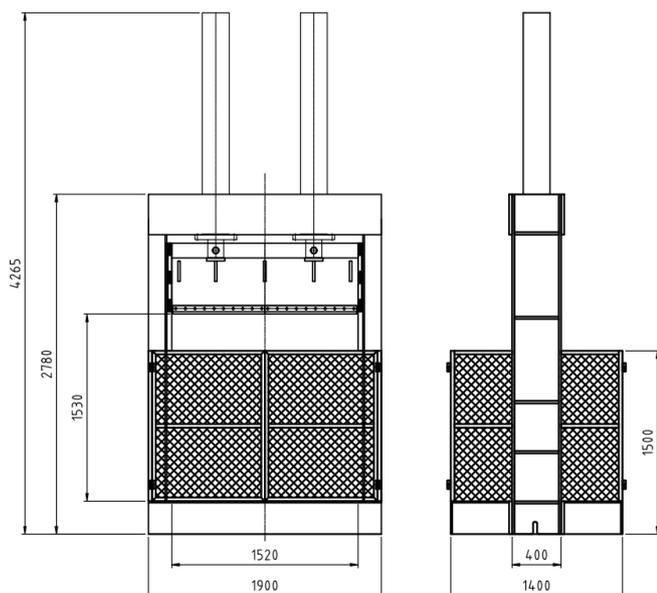

参数 Specifications

型号	XTY-1000L	XTY-1500L
压力 Pressure	80tons	150tons
加料口尺寸 (L*H) Feed Opening Size (L*H)	1000*1030mm	1500*1530mm
压缩腔高度 Baling Chamber Height	1030mm	1530mm
功率 Power	15kw	22kw
机器重量 Machine Weight	3000kgs	4000kgs
机器外观尺寸 Machine Overall Dimension	1340*1400*3000mm	1900*1400*4300mm

机器特点

- 欧盟安全防护标准，确保操作者安全
- 合理的双剪式切刀设计，提高了剪切效率，延长切刀的使用寿命
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 采用台湾液压系统

Features

- With European safety standard ensures the safety of the operation
- Unique double-cutting design of cutters improves the cutting efficiency and lengthens the service life of the cutters
- Equipped with independent emergency stop for safe operation;
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Equipped with Taiwan imported hydraulic systemleakage problems

