

纺织品/服装打包机 Textile/Clothes Balers


适用范围 /

专门用于二手衣服,被子,鞋子等产品的 回收打包,被大量使用在旧衣服回收工


Usage

Widely applied by second-hand clothes recycling plants for compressing second--hand clothing, comforters, shoes etc.

Diagram (Model XTY-500LTX7555)

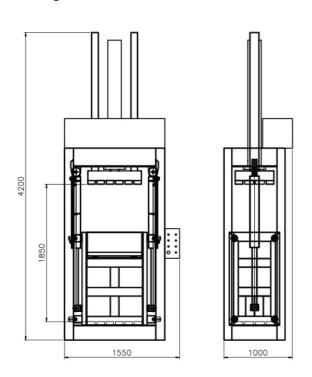

Bale Size (Model XTY-500LTX7555)









参数 Specifications

| 型号 | XTY-300LTX6040 | XTY-500LTX7555 | XTY-1500LTX11080 |
|---|---------------------|---------------------|----------------------|
| 压力 Pressure | 30tons | 50tons | 150tons |
| 加料口尺寸 (L*H) Feed Opening Size (L*H) | 600*400mm | 750*350mm | 1100*600mm |
| 压缩腔高度 Baling Chamber Height | 1400mm | 1850mm | 1850mm |
| 包块尺寸 (L*W*H, H可调) Bale Size (L*W*H, H is adjustable) | 650*450*(400-600)mm | 800*600*(400-550)mm | 1150*850*(500-900)mm |
| 包块重量 Bale Weight | 40-60kgs | 80-120kgs | 300-400kgs |
| 功率 Power | 5.5kw | 11kw | 18.5kw |
| 机器重量 Machine Weight | 1800kgs | 2800kgs | 6000kgs |
| 机器外观尺寸 Machine Overall Dimension | 1250*800*3700mm | 1550*1000*4200mm | 2000*1450*4300mm |

机器特点

- 液压提箱,提高工作效率,方便套包和#字捆包
- 采用开门停机设计,使机器更安全可靠
- ◆ 装配急停按钮,单独安装,位置醒目,使操作更安全
- 装配自动平衡装置,避免因放置物料不当产生意外
- 采用日本进口NOK密封圈,使用寿命更长
- 采用日本A.M.C油管接头,确保不漏油
- 独特的电机和泵的直叉连接,保证泵和电机100%同心, 替代了一般的联轴器联结方式,提高了泵的使用寿命



Features /

- Hydraulic lifting chamber door improves the work efficiency, conveniently for packaging and the '# 'tying
- The ram will stop running downwards when the feeding gate is opened which ensure the safety of the operation
- Equipped with independent emergency stop for safe operation
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Peculiar combination of motor and pump with direct-crossed connection makes sure 100 percent concentricity, which replacing the common coupling connection so that extend the lifespan of the pump